


08CU-5777

AMENDMENTS TO THE CLAIMS


1. (Currently amended) A polyimide molding composition comprising:
- (a) at least one thermoplastic polyimide resin;
 - (b) at least one second thermoplastic resin which is chemically distinct from any polyimide resin; and
 - (c) a poly(diorganosiloxane), wherein the poly(diorganosiloxane) has the formula

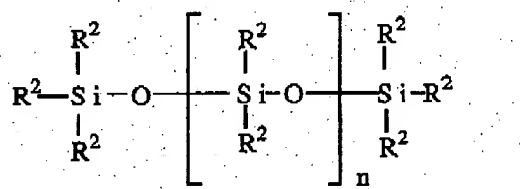

A'

wherein each R² independently is hydrogen, C₁₋₁₅ alkyl, halogenated C₁₋₁₅ alkyl, fluorinated C₁₋₁₅ alkyl, C₂₋₁₀ alkenyl, C₅₋₁₂ cycloalkyl, C₆₋₁₂ aryl, or C₇₋₁₈ alkaryl, and wherein n is such that the compound has a nominal weight average molecular weight of from about 100,000 to about 1,500,000 grams/mole.


2. (Original) The composition of claim 1, wherein a polyimide resin (a) comprises repeat units of the formula



wherein a is an integer from about 10 to about 10,000; V is a tetravalent linker selected from the group consisting of substituted and unsubstituted, saturated, unsaturated and aromatic monocyclic and polycyclic groups having about 5 to about 50 carbon atoms, substituted and unsubstituted, linear and branched, saturated and unsaturated alkyl groups having 1 to about 30 carbon atoms; and combinations thereof; and R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight and branched chain alkylene radicals having about 2 to about 20


08CU-5777

carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, and divalent radicals of the formula




wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof.

3. (Original) The composition of claim 2, wherein V is selected from the group consisting of tetravalent aromatic radicals of formula

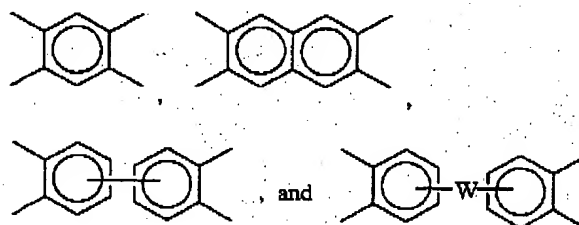


wherein W is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, C_yH_{2y} wherein y is an integer from 1 to 5, or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z is selected from the group consisting of divalent radicals of formula

08CU-5777

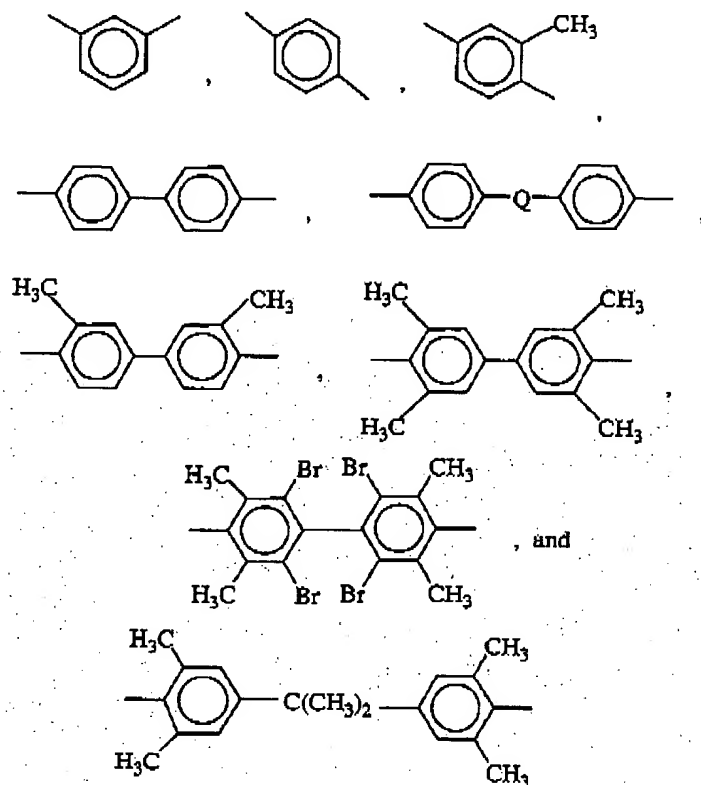


wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof.

4. (Original) The composition of claim 1, wherein a thermoplastic polyimide resin comprises repeat units of the formula

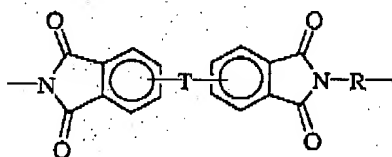


wherein T is -O- or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z is selected from the group consisting of divalent radicals of formula

08CU-5777

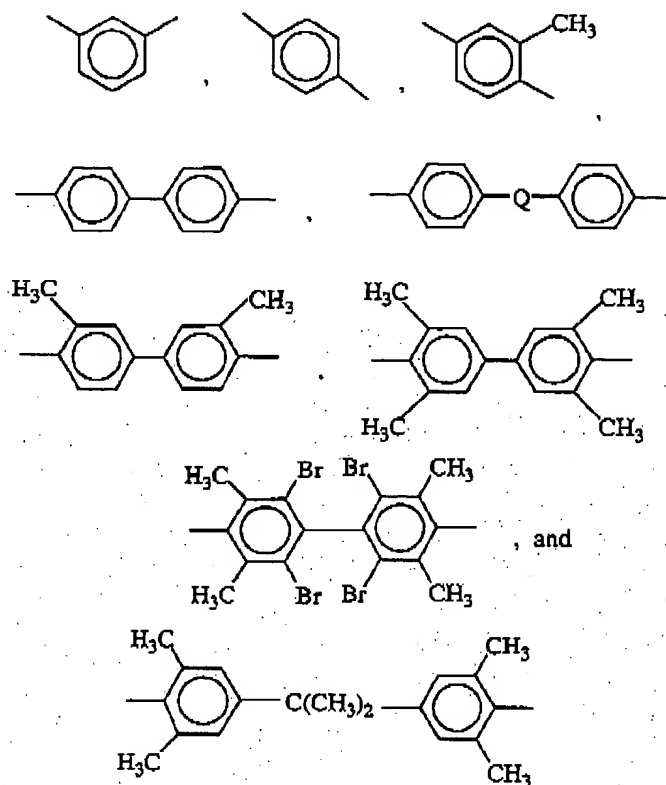


wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof; and R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight and branched chain alkylene radicals having about 2 to about 20 carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, and divalent radicals of the formula




wherein Q is as defined above.

5. (Original) The composition of claim 1, wherein a thermoplastic polyimide resin comprises repeat units of the formula


08CU-5777

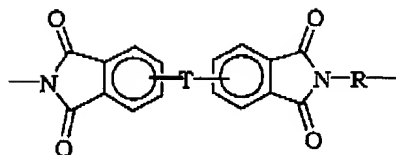


wherein R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; and T is a divalent radical of the formula



6. (Original) The composition of claim 1, wherein a thermoplastic polyimide comprises structural units of the formula




wherein R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight or branched chain alkylene radicals having about 2 to about 20 carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, or divalent radicals of the formula



wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, or C_yH_{2y}, wherein y is an integer from 1 to 5; and M is selected from the group consisting of radicals of formula


08CU-5777

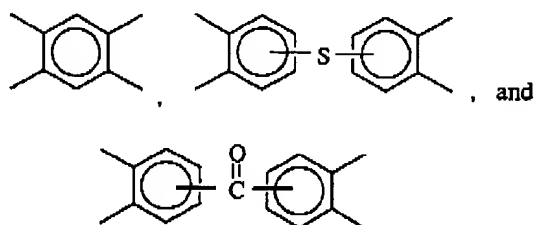


7. (Original) The composition of claim 1, wherein the second thermoplastic polymer is selected from the group consisting of polycarbonate esters, epoxy-functionalized polyolefins, poly(tetrafluoroethylene)s, polyetherimide-siloxane copolymers, polyarylates, polysulfones, polyether sulfones, and polyphenylene ethers, polyamides, polyesters, and combinations thereof.

8. (Original) The composition of claim 1, wherein the second thermoplastic polymer is selected from the group consisting of polycarbonate esters, epoxy-functionalized polyolefins, poly(tetrafluoroethylene)s, polyetherimide-siloxane copolymers, polyesters, and combinations thereof.


9. (Original) The composition of claim 1, wherein the second thermoplastic polymer is at least one polycarbonate ester comprising repeating polycarbonate chain units of the formula



and recurring carboxylic chain units of the formula




wherein R¹ is a divalent moiety of the formulae :




or

08CU-5777



or the corresponding naphthalene derivatives, or mixtures thereof; and wherein each D is independently a divalent aromatic radical of a dihydric phenol represented by the formula

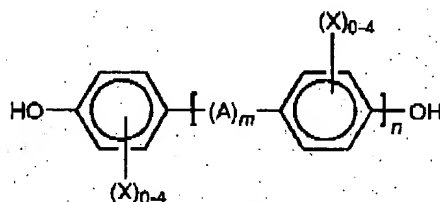

wherein A is selected from the group consisting of a divalent hydrocarbon radical containing from 1 to about 15 carbon atoms, a substituted divalent hydrocarbon radical containing from 1 to about 15 carbon atoms, $-\text{C}(\text{O})-$, $-\text{S}-$, $-\text{SS}-$, $-\text{S}(\text{O})_2-$, $-\text{O}-$, and $-\text{S}(\text{O})-$; each X is independently selected from the group consisting of hydrogen, halogen, and a monovalent hydrocarbon radical, wherein said hydrocarbon radical is an alkyl group of from 1 to about 8 carbon atoms, an aryl group of from 6 to about 18 carbon atoms, an aralkyl group of from 7 to 14 carbon atoms, an alkaryl group of from 7 to about 14 carbon atoms, or an alkoxy group of from 1 to about 8 carbon atoms; and m is 0 or 1 and n is an integer of from 0 to about 5.

10. (Withdrawn)

11. (Withdrawn)

12. (Cancelled)

13. (Currently amended) The composition of claim 12, wherein the poly(diorganosiloxane) has the formula MD_xM , or the formula $\text{M}^{\text{Vi}}-\text{D}_x\text{D}^{\text{Vi}}-\text{y}-\text{M}^{\text{Vi}}$ containing about 0.25 mole % Vi groups.

14. (Currently amended) The composition of claim 12, wherein the poly(diorganosiloxane) has a penetration value of less than or equal to about 800 mm.

08CU-5777

15. (Cancelled)

16. (Cancelled)

17. (Cancelled)

18. (Cancelled)

19. (Cancelled)

20. (Cancelled)

21. (Original) The composition of claim 1, further comprising at least one additive selected from the group consisting of pigments, titanium dioxide, carbon black, reinforcing agents, fillers, fumed silica, mold release agents, flow promoters, processing aids, colorants, ultraviolet screening agents, lubricants, viscosity modifiers, heat stabilizers, flame retardants, and combinations thereof.


22. (Original) An article of manufacture molded from the composition of claim 1.

23. (Currently amended) A method of making a polyimide molding composition, which comprises blending

(a) at least one thermoplastic polyimide resin;

(b) at least one second thermoplastic resin which is chemically distinct from the polyimide resin; and

(c) a poly(diorganosiloxane), wherein the poly(diorganosiloxane) has the formula

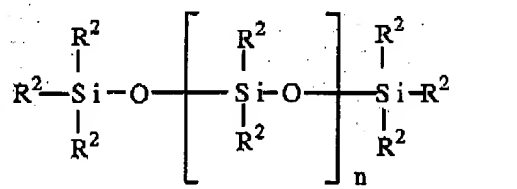


wherein each R² independently is hydrogen, C₁₋₁₅ alkyl, halogenated C₁₋₁₅ alkyl, fluorinated C₁₋₁₅ alkyl, C₂₋₁₀ alkenyl, C₅₋₁₂ cycloalkyl, C₆₋₁₂ aryl, or C₇₋₁₈ alkaryl, and wherein n is such that the compound has a nominal weight average molecular weight of from about 100,000 to

08CU-5777


Q³

about 1,500,000 grams/mole.

24.(Original) The method of claim 23, wherein a polyimide resin (a) comprises repeat units of the formula




wherein a is an integer from about 10 to about 10,000; V is a tetravalent linker selected from the group consisting of substituted and unsubstituted, saturated, unsaturated and aromatic monocyclic and polycyclic groups having about 5 to about 50 carbon atoms; substituted and unsubstituted, linear and branched, saturated and unsaturated alkyl groups having 1 to about 30 carbon atoms; and combinations thereof; and R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight and branched chain alkylene radicals having about 2 to about 20 carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, and divalent radicals of the formula




wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof.

25. (Original) The method of claim 24, wherein V is selected from the group consisting of tetravalent aromatic radicals of formula

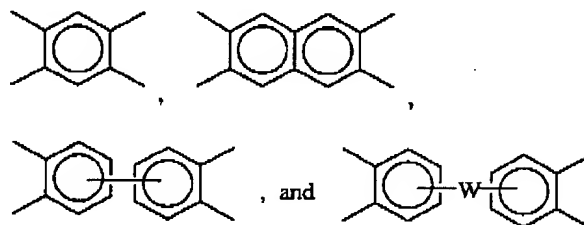


08CU-5777

wherein W is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, C_yH_{2y} wherein y is an integer from 1 to 5, or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z is selected from the group consisting of divalent radicals of formula

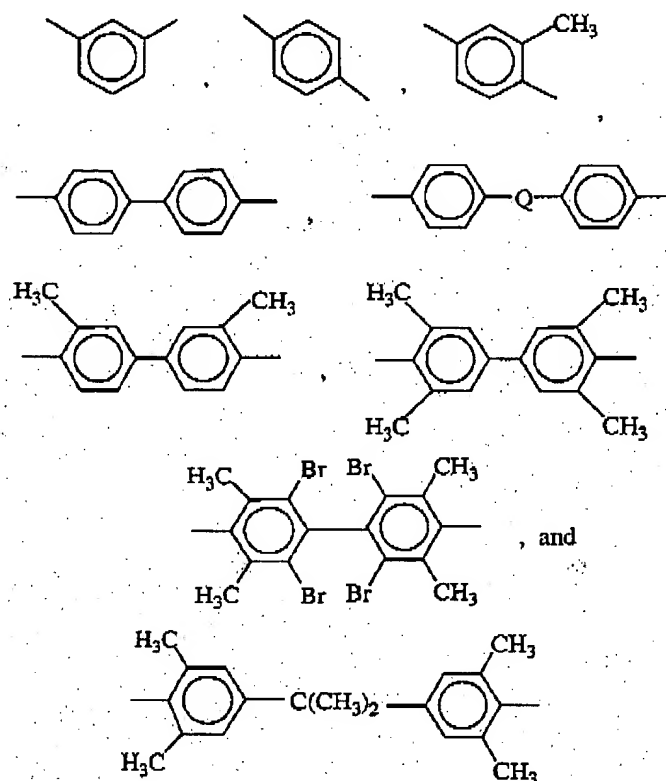


wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof.

26. (Original) The method of claim 23, wherein a thermoplastic polyimide resin comprises repeat units of the formula

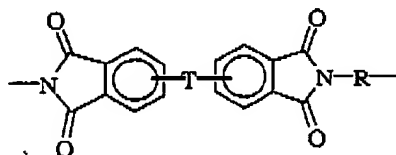


08CU-5777

wherein T is -O- or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z is selected from the group consisting of divalent radicals of formula

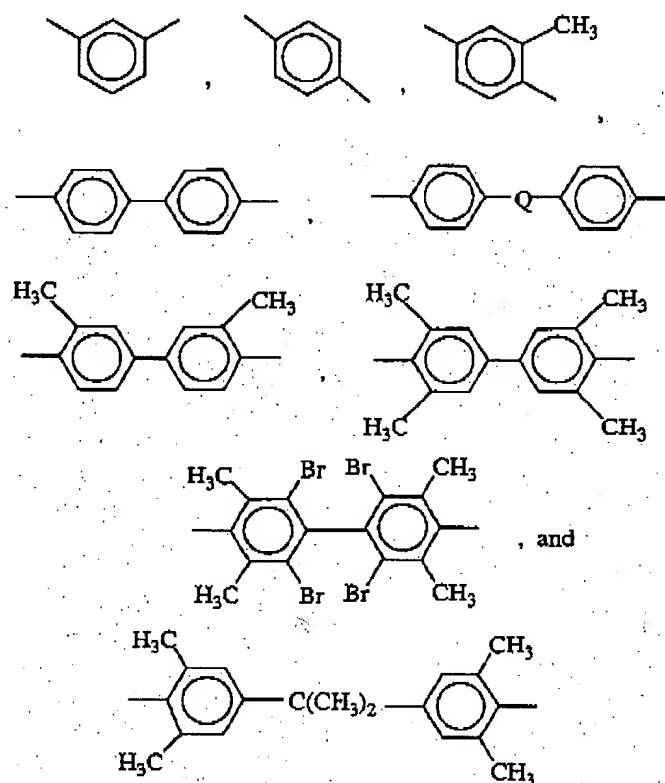


wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, and C_yH_{2y}, wherein y is an integer from 1 to 5, and halogenated derivatives thereof; and R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight and branched chain alkylene radicals having about 2 to about 20 carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, and divalent radicals of the formula




wherein Q is as defined above.

08CU-5777


27. (Original) The method of claim 23, wherein a thermoplastic polyimide resin comprises repeat units of the formula

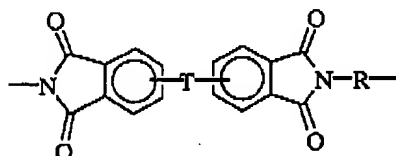


wherein R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; and T is a divalent radical of the formula



28. (Original) The method of claim 23, wherein a thermoplastic polyimide comprises structural units of the formula




wherein R is selected from the group consisting of aromatic hydrocarbon radicals having about 6 to about 20 carbon atoms and halogenated derivatives thereof; straight or branched chain alkylene radicals having about 2 to about 20 carbon atoms; cycloalkylene radicals having about 3 to about 20 carbon atoms, or divalent radicals of the formula



wherein Q is a divalent moiety selected from the group consisting of -O-, -S-, -C(O)-, -SO₂-, or C_yH_{2y}, wherein y is an integer from 1 to 5; and M is selected from the group consisting of radicals of formula


08CU-5777

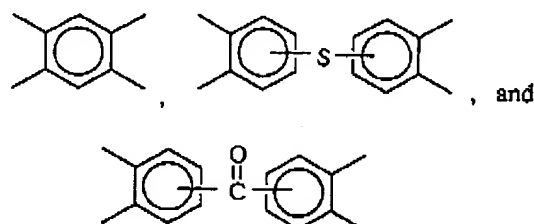


29. (Original) The method of claim 23, wherein the second thermoplastic polymer is selected from the group consisting of polycarbonate esters, epoxy-functionalized polyolefins, poly(tetrafluoroethylene)s, polyetherimide-siloxane copolymers, polyarylates, polysulfones, polyether sulfones, and polyphenylene ethers, polyamides, polyesters, and combinations thereof.

30. (Original) The method of claim 23, wherein the second thermoplastic polymer is selected from the group consisting of polycarbonate esters, epoxy-functionalized polyolefins, poly(tetrafluoroethylene)s, polyetherimide-siloxane copolymers, polyesters, and combinations thereof.


31. (Original) The method of claim 23, wherein the second thermoplastic polymer is at least one polycarbonate ester comprising repeating polycarbonate chain units of the formula



and recurring carboxylic chain units of the formula




wherein R¹ is a divalent moiety of the formulae :




or

08CU-5777



or the corresponding naphthalene derivatives, or mixtures thereof; and wherein each D is independently a divalent aromatic radical of a dihydric phenol represented by the formula

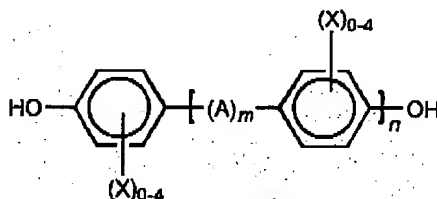

wherein A is selected from the group consisting of a divalent hydrocarbon radical containing from 1 to about 15 carbon atoms, a substituted divalent hydrocarbon radical containing from 1 to about 15 carbon atoms, $-\text{C}(\text{O})-$, $-\text{S}-$, $-\text{SS}-$, $-\text{S}(\text{O})_2-$, $-\text{O}-$, and $-\text{S}(\text{O})-$; each X is independently selected from the group consisting of hydrogen, halogen, and a monovalent hydrocarbon radical, wherein said hydrocarbon radical is an alkyl group of from 1 to about 8 carbon atoms, an aryl group of from 6 to about 18 carbon atoms, an aralkyl group of from 7 to 14 carbon atoms, an alkaryl group of from 7 to about 14 carbon atoms, or an alkoxy group of from 1 to about 8 carbon atoms; and m is 0 or 1 and n is an integer of from 0 to about 5.

32. (Withdrawn)

33. (Withdrawn)

34. (Cancelled)

35. (Currently amended) The method of claim 3423, wherein the poly(diorganosiloxane) has the formula MD_xM , or the formula $\text{M}^{\text{Vi}}-\text{D}_x\text{D}^{\text{Vi}}_y-\text{M}^{\text{Vi}}$ containing about 0.25 mole % Vi groups.

36. (Currently amended) The method of claim 3423, wherein the poly(diorganosiloxane) has a penetration value of less than or equal to about 800 mm.

08CU-5777

37. (Cancelled)

38. (Cancelled)

39. (Cancelled)

40. (Cancelled)

41. (Cancelled)

42. (Cancelled)

43. (Original) The method of claim 23, further comprising at least one additive selected from the group consisting of pigments, titanium dioxide, carbon black, reinforcing agents, fillers, mold release agents, flow promoters, processing aids, colorants, ultraviolet screening agents, lubricants, viscosity modifiers, heat stabilizers, flame retardants, and combinations thereof.

44. (Original) The method of claim 23, wherein a poly(diorganosiloxane) is first dispersed into a matrix selected from the group consisting of at least one thermoplastic polyimide resin (a), at least one second thermoplastic resin (b) which is chemically distinct from any thermoplastic polyimide resin, a high surface area inorganic material selected from the group consisting of silica, titania, alumina, Wollastonite, clays, bentonite, kaolin, zeolites, barium sulfate, and carbon black, and a mixture of any two or more of the foregoing, prior to blending with the other components.

45. (Original) The method of claim 23, wherein a poly(diorganosiloxane) is first dispersed into an inorganic matrix selected from the group consisting of silica, titania, alumina, Wollastonite, clays, bentonite, kaolin, zeolites, barium sulfate, and carbon black, and then dispersed into an organic matrix selected from the group consisting of at least one thermoplastic polyimide resin (a), at least one second thermoplastic resin (b) which is chemically distinct from any polyimide resin, and a mixture of any two or more of the foregoing.

08CU-5777

46.(Original) A polyimide molding composition comprising:

(a) at least one thermoplastic polyetherimide resin comprising structural units derived from meta-phenylene diamine and 2, 2-bis[4-(3,4-dicarboxyphenoxy)phenyl]propane dianhydride;

(b) a polycarbonate ester resin having about 60% ester units relative to carbonate units, and comprising structural units derived from bisphenol-A and about a 1:1 ratio of isophthalic acid to terephthalic acid;

(c) a poly(diorganosiloxane) of the formula MD_xM , or a poly(diorganosiloxane) of the formula $M^{Vi}_x-D_xD^{Vi}_y-M^{Vi}$ containing about 0.25 mole % Vi groups; and

(d) optionally at least one additive selected from the group consisting of pigments, titanium dioxide, carbon black, reinforcing agents, fillers, fumed silica, mold release agents, flow promoters, processing aids, colorants, ultraviolet screening agents, lubricants, viscosity modifiers, heat stabilizers, flame retardants, and combinations thereof.

47. (Original) The composition of claim 46, wherein polycarbonate ester is present in the composition in the range of from about 5% to about 95%, by weight, based on combined weight of components (a) and (b); poly(diorganosiloxane) is present in the composition in the range of about 0.1-10%; and fumed silica is optionally present in the composition in an amount of from about 30 to about 100 parts by weight based on the weight of the poly(diorganosiloxane).

48. (Original) The composition of claim 47 containing fumed silica.

49. (Original) The composition of claim 48 containing carbon black.

50. (Original) The composition of claim 46 containing carbon black.

51. (Cancelled)

52. (Cancelled)

53. (Cancelled)

08CU-5777

54. (Cancelled)

55. (Cancelled)

56. (Cancelled)